




1.50 m Ø 12 mm

480 g



>> Type of use (*)

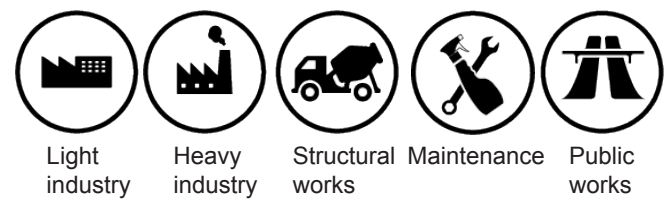

>> Technical features

- ✓ Fall arrest lanyard. Stranded polyamide rope.
- ✓ Integrated energy absorber, protected by a plastic sheath.
- ✓ Splice on one side.
- ✓ Minimum air draft required: **6.00 m (factor 2)**.
- ✓ Length: **1,50 m**.
- ✓ Diameter: **12 mm**.
- ✓ Weight: **480 g**.
- ✓ Packing: - carton of 20 pieces.
- bundle of 1 piece.



Learn more: www.singer.fr

>> Advantages

- ✓ The lanyard at the end is protected with a strong transparent protective covering sleeve.
- ✓ The loops at the end are protected by an abrasion resistant thimble. This prevents the rope from being damaged by the metallic contact of a connector.
- ✓ The rope also has a coloured tracer strand which loses its colour in due course of time, to show that the lanyard is now unfit for further use.
- ✓ **ISO 9001** certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:
- **EN 355: 2002**. Personal protective equipment against falls from a height. Energy absorbers.



It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category III**.
EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body n°2777.
The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**.
Notified body n°0598.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**



(*) Type of use is given as a guide only. It is to the end user to check whether the product is suitable or not for the intended use. Before any use, read carefully the instructions enclosed with the product. Issue US_2019_1227. Copyright: Singer, Fodlia.