




## Area of use\*

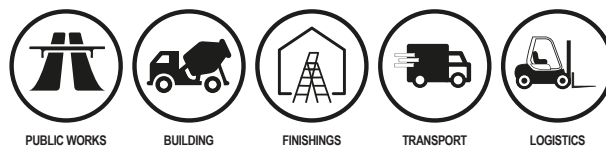

## Technical features

### High visibility parka.

**Outside material:** 100% polyester (Oxford 300D) coated with PU, 170 gsm.

**Lining:** 100% taffeta polyester, 50 gsm. Taped seams. Attached hood with drawcords, rolled into collar. 3 outer pockets and 1 inner pocket. Badge holder.

Zip fastening (two ways) under studded flap. Waist with drawcords and stoppers.

Segmented retro-reflective tapes. Zip access for print.

### Removable inner jacket.

**Outside material:** 100% polyester (Oxford 300D) coated with PU, 170 gsm.

**Lining:** polar fleece polyester, 280 gsm (body) and taffeta polyester, 50 gsm.

**Padding:** 100% polyester, 120 gsm. Taped seams. Detachable sleeves.


2 outer pockets and 2 inner pockets. Zip fastening.

Knitted wrists. Segmented retro-reflective tapes. Zip access for print.

**Colour:** red and black. **Sizes:** S to 3XL.

**Packaging:** carton of 10 pieces.

**Subpackaging:** individual polybag.



## Advantages

**Versatile** thanks to the removable inner jacket.

**Resistant and light** thanks to the outside material (300D Oxford polyester coated with PU).

**Better visibility** thanks to retro-reflective tapes.

**Customizable** thanks to the zip access for printing.

**Quality and safety of materials** with OEKO-TEX® certification.

**Functional and practical** thanks to various outer pockets.



## Certification

This product complies with **European Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category II.**

Issued by **SGS Fimko Oy**, notified body n°0598.

EN ISO 13688 : 2013 + A1 : 2021	EN ISO 20471 : 2013 + A1 : 2016	EN ISO 20471 : 2013 + A1 : 2016	EN ISO 20471 : 2013 + A1 : 2016	EN 343 : 2019	EN 342 : 2017
3	3	2	3 1 X	0.337 3 WP	
PARKA	JACKET	BODYWARMER			

	Light wind		Moderate wind	
	8h	1h	8h	1h
Low activity	-4°C	-21°C	4°C	-11°C
Moderate activity	-22°C	-40°C	-10°C	-26°C


For example, the green box means that the user, wearing the PARIRED + EN 342 trousers outfit, carrying out a moderate activity (i.e. who is not stationary, who moves, carries, walks, etc.), can be exposed to a temperature of -26°C for 1 hour with moderate wind without fear for one's health, that is to say without a significant drop in the temperature inside the garment.




Download the EU declaration of conformity on <https://docs.singer.fr>

(\* ) Example of use given as a guide only. The end user must check whether the product is suitable or not for the intended use. Before any use, read carefully the instructions enclosed with the product. Exclusive sale to professionals. Edition CL 11/06/2025 - © Singer® Safety.


### EN 14058 - AGAINST COOL ENVIRONMENTS

	A	Thermal resistance. Class 1 to 4 (4 being the best).
	B	Air permeability. Class 1 to 3 (3 being the best).
	C	Resulting thermal insulation. Optional test.
	D	Resistance to water penetration. Optional test.

### EN 343 - AGAINST BAD WEATHER

	A	Resistance to water penetration. Class 1 to 4 (class 4 being the best).
	B	Evaporative resistance. Class 1 to 4 (class 4 being the best).
	R	Controlled under a rain simulator (optional). Class R.

### EN ISO 11611 - WELDING AND ALLIED PROCESSES


	Class 1	Against minor risks: Less projections and a weak radiant heat.
	Class 2	Against important risks: More projections and a more important radiant heat.
	A1 or A2	Test method used for spreading of the flame, in conformity with the standard ISO 15024/2000.

### EN ISO 11612 - PROTECTION AGAINST HEAT AND FLAME

	A1 and/or A2	Limited flame spread.
	B1 to B3	Convective heat.
	C1 to C4	Radiant heat.
	D1 to D3	Molten aluminium splash.
	E1 to E3	Molten iron splash.
	F1 to F3	Contact heat.

This standard imposes a number of requirements in terms of product design (for example: the flap of the outer pockets must be larger than the pocket ...). Each garment must bear the code letters A1 and / or A2 plus at least another code letter.

### EN ISO 14116 - LIMITED FLAME SPREAD


	A	Index 1	Limited flame spread / Absence of burning debris / Residual glow.
		Index 2	Limited flame spread / Absence of burning debris / Residual glow / No hole formations.
		Index 3	Limited flame spread / Absence of burning debris / Residual glow / No hole formations / Limited persistence of flame.
	B	-	Number of washes.
	C	H	Home washing.
		I	Industrial washing.
		C	Chemical washing.
	D	-	Washing temperature.

If the materials can not be washed: BC/D = 0/0. The pictogram (see above) can be used only if the product has been tested to another standard of flame protection.

### EN 1149-5 - ELECTROSTATIC PROPERTIES


	Electrostatic properties, part 5. Material performance and design requirements.
--	--

### EN ISO 20471 - HIGH VISIBILITY


	Class 1	Background material: > 0,14 m². Retro-reflective material: > 0,10 m². Combined performance material: > 0,20 m².
	Class 2	Background material: > 0,50 m². Retro-reflective material: > 0,13 m². Combined performance material: - m².
	Class 3	Background material: > 0,80 m². Retro-reflective material: > 0,20 m². Combined performance material: - m².

The coefficient of retro-reflection of the retro-reflective material must be class 2 to comply with EN ISO 20471 (class 1 of previous EN 471 standard has been cancelled).  
«X» indicates the class of the garment according to the compulsory minimum area.

### EN 14404 - KNEE PROTECTION


	Type 1	Protective portable knee pads.
	Type 2	Knee pads associated with clothing.
	Type 3	Carpet for knees.
	Type 4	Kneeling systems.
	Level 0	Flat floors, no resistance to penetration required.
	Level 1	Flat floors, resistance to penetration of 100N.
	Level 2	Flat or irregular surfaces, resistance to penetration of 100N.
Level 3	Flat or irregular surfaces under difficult conditions, resistance to penetration of 250N.	

### EN 61482 - THERMAL HAZARDS OF AN ELECTRICAL ARC


	APC 1	Tested with an electrical arc of 4 000 amperes
	APC 2	Tested with an electrical arc of 7 000 amperes

Also, for each class, are checked: - Absence of flame spread.  
- Absence of heat transfer that can burn the user to the 2nd degree.  
- Proper functioning of the EPI closure systems after the tests.


### EN 943, EN 14605, EN ISO 13982, EN 13034 AGAINST CHEMICALS

	Type 1	Gaz tight.
	Type 2	Non gaz tight.
	Type 3	Liquid-tight connections.
	Type 4	Spray-tight connections.
	Type 5	Protection to the full body against airborne solid particulates.
	Type 6	Limited protection against liquid chemicals.

### EN 14126 - AGAINST INFECTIVE AGENTS

	Performance requirements and tests methods for protective clothing against infective agents.
---	--

### EN 1073-2 - AGAINST RADIOACTIVE CONTAMINATION

	Requirements and test methods for non-ventilated protective clothing against particulate radioactive contamination.
---	---

"X" means that the glove has not been submitted to the test.